


Composite Cladding Profiles

Product views, cross-sections and nominal specifications

AVAILABLE PROFILES

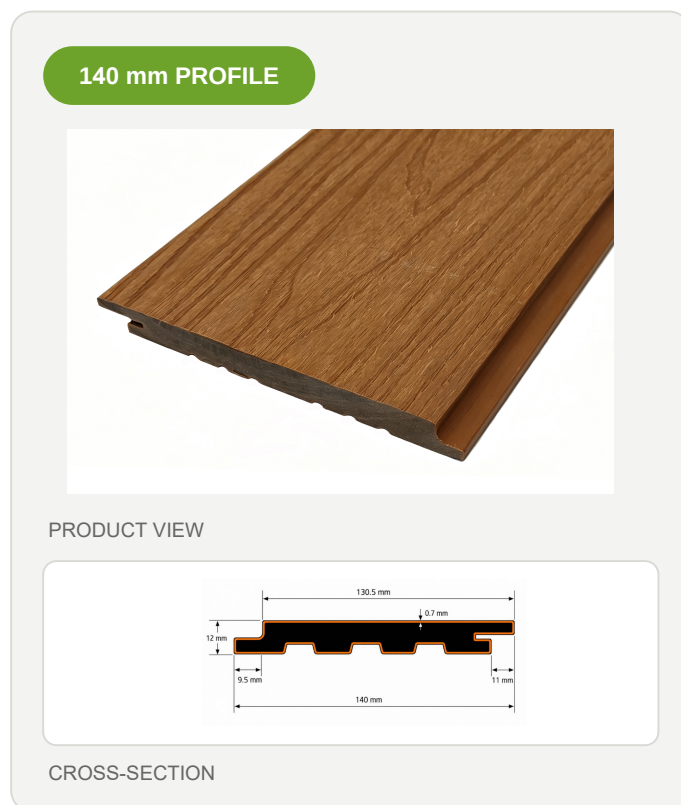

DIMENSIONS AND WEIGHT


PROFILE	DIMENSIONS	WEIGHT P/LM
140 mm	140 x 12 x 2900 mm	1.77 kg

P/LM = per linear metre. Dimensions shown are width x thickness x length.


Colours & Surface Textures

A clear reference palette with friendly colour and finish labels

COLOUR PALETTE

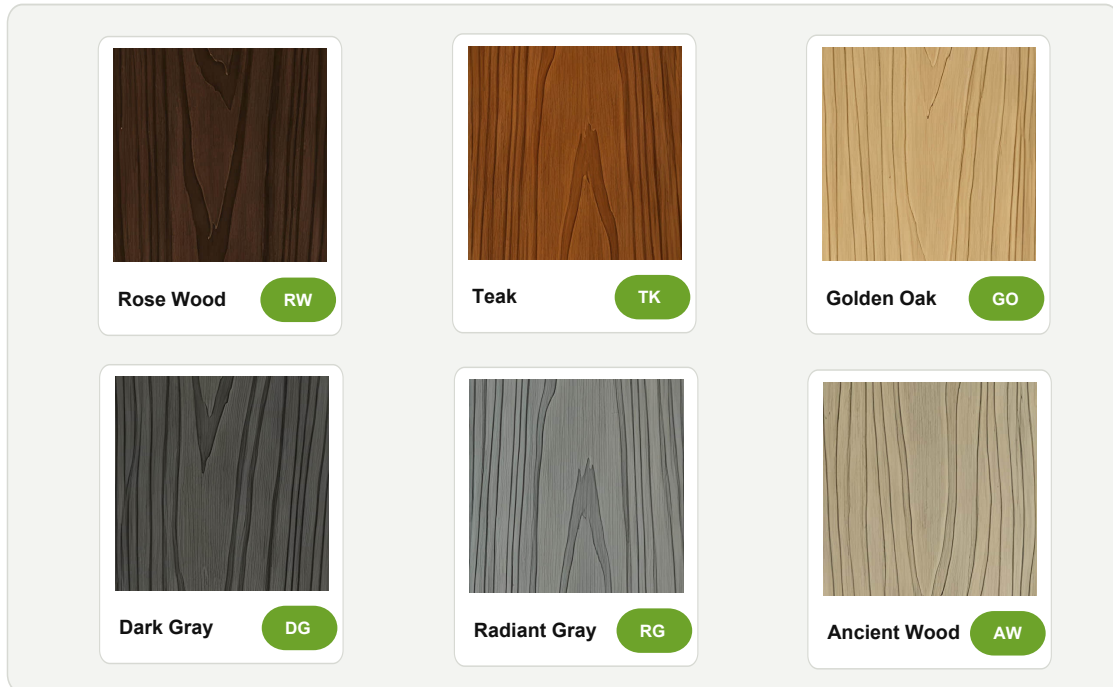

SURFACE TEXTURES

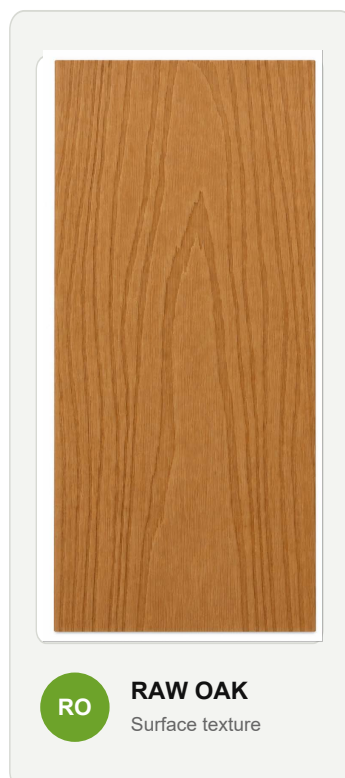

Fixing Accessories

Self-drilling screws and concealed siding clips for LastElegance Oakling Shiplap Composite Cladding

FIXING ACCESSORIES

Screws & Clips

The LastElegance range of fixing accessories covers self-drilling screws for steel sub-framing and concealed clips for Oakling Shiplap Composite Cladding. The screw drill point forms its own hole, so no pre-drilling is required, while the clip plate fixes flat to the batten and locates the board in its groove.

FEATURES

- Self-drilling screws in stainless steel 410.
- Screw diameters 3.9 / 4.2 mm, lengths 25 – 48 mm.
- Siding clips in stainless steel 201 / 304 / 316.


SCREW FIXINGS



Self-Drilling Screws — Silver

SELF-DRILLING SCREWS (FOR STEEL JOINT)

- **Material:** Stainless steel 410
- **Diameter:** 3.9 / 4.2 mm
- **Length:** 25 / 30 / 42 / 48 mm
- **Colour range:** Silver / black /
- **Finish:** Silver
- **Application:** Steel joint fixing



Self-Drilling Screws — Black

SELF-DRILLING SCREWS (FOR STEEL JOINT)

- **Material:** Stainless steel 410
- **Diameter:** 3.9 / 4.2 mm
- **Length:** 25 / 30 / 42 / 48 mm
- **Colour range:** Silver / black /
- **Finish:** Black
- **Application:** Steel joint fixing

CLIP FIXINGS



Silver H-Shaped Clamp with Barbs

H-TYPE CLIP WITH THORN

- **Material:** Stainless steel 201 / 304 / 316
- **Thickness:** 0.9 / 1.0 / 1.2 mm
- **Applicable board height:** 4 mm to 12 mm
- **Installation type:** Stepping mounting
- **Gap:** No visible gap
- **Piercing method:** Convex / piercing / reaming
- **Finish:** Silver



Black H-Shaped Clamp with Barbs

H-TYPE CLIP WITH THORN

- **Material:** Stainless steel 201 / 304 / 316
- **Thickness:** 0.9 / 1.0 / 1.2 mm
- **Applicable board height:** 4 mm to 12 mm
- **Installation type:** Stepping mounting
- **Gap:** No visible gap
- **Piercing method:** Convex / piercing / reaming
- **Finish:** Black

ORDERING NOTES

Screw lengths are supplied as per customers' requirements. Fastener and clip quantities should be calculated from cladding area and batten spacing.