

Composite Decking Profiles


Product views, cross-sections and nominal specifications

AVAILABLE PROFILES

139 mm PROFILE



PRODUCT VIEW

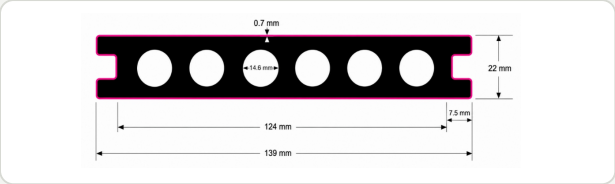


CROSS-SECTION

139 mm PROFILE



PRODUCT VIEW

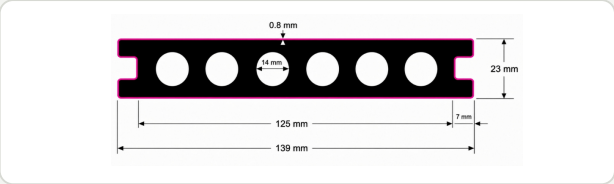

CROSS-SECTION

DIMENSIONS AND WEIGHT

PROFILE	DIMENSIONS	WEIGHT P/LM
139 mm	139 x 22 x 2900 mm	2.51 kg
139 mm	139 x 23 x 2900 mm	2.90 kg

P/LM = per linear metre. Dimensions shown are width x thickness x length.

Colours & Surface Textures

A clear reference palette with friendly colour and finish labels

COLOUR PALETTE




Rose Wood RW



Teak TK



Golden Oak GO



Dark Gray DG



Radiant Gray RG



Ancient Wood AW

SURFACE TEXTURES



DG **Deep Grain**
Surface texture



RO **Raw Oak**
Surface texture

Fastening System

Concealed clips and screws for Last Elegance Renew decking boards

CONCEALED FASTENERS

Fasteners

The Last Elegance range of concealed decking fasteners is designed for fixing Renew composite decking boards to timber or steel subframes. Barbed H-clips locate in the side groove of the board to hold it down and set a consistent gap, keeping the deck surface free of visible fixings.

FEATURES

- Barbed H-clips for stepping (mid-board) installation.
- Board gap options: no visible gap, 3 mm or 5 mm.
- Stainless steel construction — 201, 304 or 316 grade.
- Matching self-drilling screws for steel joists.
- Silver and black finishes to suit the board colour.



Silver H-Shaped Clamp with Barbs

H-TYPE CLIP WITH THORN

- **Material:** Stainless steel 201 / 304 / 316
- **Thickness:** 0.9 / 1.0 / 1.2 mm
- **Applicable board height:** 4 mm to 12 mm
- **Installation type:** Stepping mounting
- **Gap:** No visible gap / 3 mm / 5 mm
- **Piercing method:** Convex / piercing / reaming
- **Finish:** Silver



Black H-Shaped Clamp with Barbs

H-TYPE CLIP WITH THORN

- **Material:** Stainless steel 201 / 304 / 316
- **Thickness:** 0.9 / 1.0 / 1.2 mm
- **Applicable board height:** 4 mm to 12 mm
- **Installation type:** Stepping mounting
- **Gap:** No visible gap / 3 mm / 5 mm
- **Piercing method:** Convex / piercing / reaming
- **Finish:** Black



Self-Drilling Screws — Silver

SELF-DRILLING SCREWS

- **Material:** Stainless steel 410
- **Diameter:** 3.9 / 4.2 mm
- **Length:** 25 / 30 / 42 / 48 mm
- **Application:** Steel joist fixing
- **Head:** Countersunk, Phillips drive
- **Colour range:** Silver / black / coffee
- **Finish:** Silver



Self-Drilling Screws — Black

SELF-DRILLING SCREWS

- **Material:** Stainless steel 410
- **Diameter:** 3.9 / 4.2 mm
- **Length:** 25 / 30 / 42 / 48 mm
- **Application:** Steel joist fixing
- **Head:** Countersunk, Phillips drive
- **Colour range:** Silver / black / coffee
- **Finish:** Black

ORDERING NOTES

Fastener quantities should be calculated from deck area, board length and joist spacing.