

Composite Siding Profiles


Product views, cross-sections and nominal specifications

AVAILABLE PROFILES

219 mm PROFILE



PRODUCT VIEW

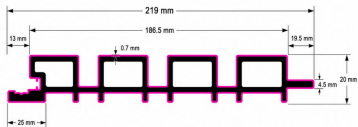

CROSS-SECTION

DIMENSIONS AND WEIGHT

PROFILE	DIMENSIONS	WEIGHT P/LM
219 mm	8.62 in x .79 in x 9.51 ft (219 x 20 x 2900 mm)	1.62 lb/ft (2.41 kg)

P/LM = per linear metre. Dimensions shown are width x thickness x length.

Colours & Surface Textures

A clear reference palette with friendly colour and finish labels

COLOUR PALETTE



Rose Wood RW




Teak TK



Golden Oak GO



Dark Gray DG



Radiant Gray RG



Ancient Wood AW

SURFACE TEXTURES



MT **Metro**
Surface texture



RT **Rhythm**
Surface texture

LastElegance DecoGroove Fluted Composite Siding - Technical Data Sheet

Material, product or form of construction	LastElegance Siding
Issued by (company)	Sichuan Hengjiu New Material Technology Co., Ltd.
Version and date of issue	3rd April 2025
Product description	Wood composite siding
Application and intended use	External wall siding or façade-type applications
Condition and limitations of use	Wind loads as defined in AS/NZS 1170.2:2021

Dimensional Properties	Test Method	Result
Width	EN 15534-1, Section 6.6.2	8.62 in (219 mm)
Thickness	EN 15534-1, Section 6.6.2	.79 in (20 mm)
Linear mass	EN 15534-1, Section 6.5	1.62 lb/ft (2.41 kg/lm)
Standard board length	EN 15534-1, Section 6.6.2	9.51 ft (2900 mm)
Board weight	EN 15534-1, Section 6.5	15.408 lb (6.989 kg) per 9.51 ft (2.9m) board
Pack Qty (Cladding)		128 lengths of 9.5 f (2.9m) boards

Please note: LastElegance Siding is subject to normal manufacturing tolerances and may vary from nominated size. Variations in material dimensions and colour within normal manufacturing variations and tolerance are not considered defects and checks should be done prior to installation.

LastElegance DecoGroove Fluted Composite Siding - Technical Data Sheet

Physical Properties	Test Method	Result
Creep behaviour	EN 15534-1: 2014, Section 7.4.1, partial	Pass dS
Resistance to artificial weathering (Xenon-arc)	EN 15534-1, Section 8.1 & EN ISO 4892-2, Cycle 1 (2000 hours)	ΔE 1.45; Grey Scale 4-5
Resistance against discolouring micro-fungi	ISO 16869	Class 0
Fire reaction	EN 13501-1	Class C
Swelling and water absorption	EN 15534-1, Section 8.3.1 & EN 317	Water absorption: 3.5% Length: 0.5% Width: 0.1% Thickness: 0.6%

Thermal Properties	Test Method	Result
Linear thermal expansion	EN 15534-1, Section 9.2	$40 \times 10^{-6} \text{ K}^{-1}$