

# Composite Decking Profiles


Product views, cross-sections and nominal specifications

## AVAILABLE PROFILES

### 140 mm PROFILE



PRODUCT VIEW




CROSS-SECTION

### 140 mm PROFILE



PRODUCT VIEW



CROSS-SECTION

## DIMENSIONS AND WEIGHT


| PROFILE | DIMENSIONS                                        | WEIGHT P/LM             |
|---------|---------------------------------------------------|-------------------------|
| 140 mm  | .79 in x 5.5 in x 9.51 ft<br>(140 x 20 x 2900 mm) | 2.50 lb/ft<br>(3.72 kg) |
| 140 mm  | .91 in x 5.5 in x 9.51 ft<br>(140 x 23 x 2900 mm) | 2.82 lb/ft<br>(4.2 kg)  |

P/LM = per linear metre. Dimensions shown are width x thickness x length.


## Colours & Surface Textures

A clear reference palette with friendly colour and finish labels

### COLOUR PALETTE

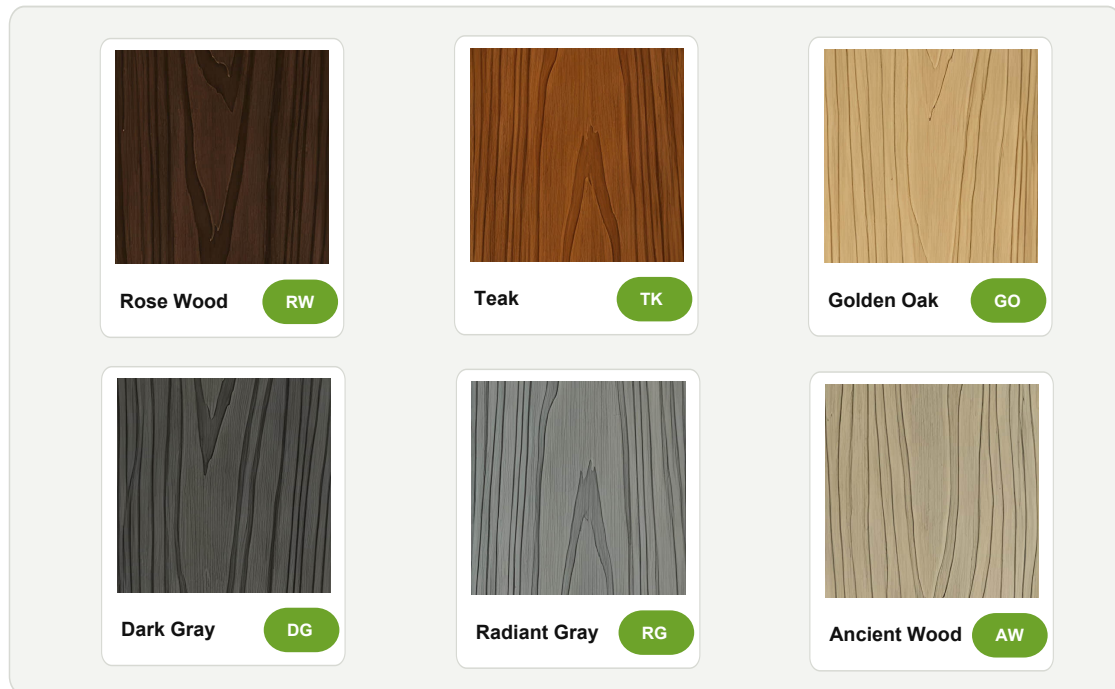

### SURFACE TEXTURES

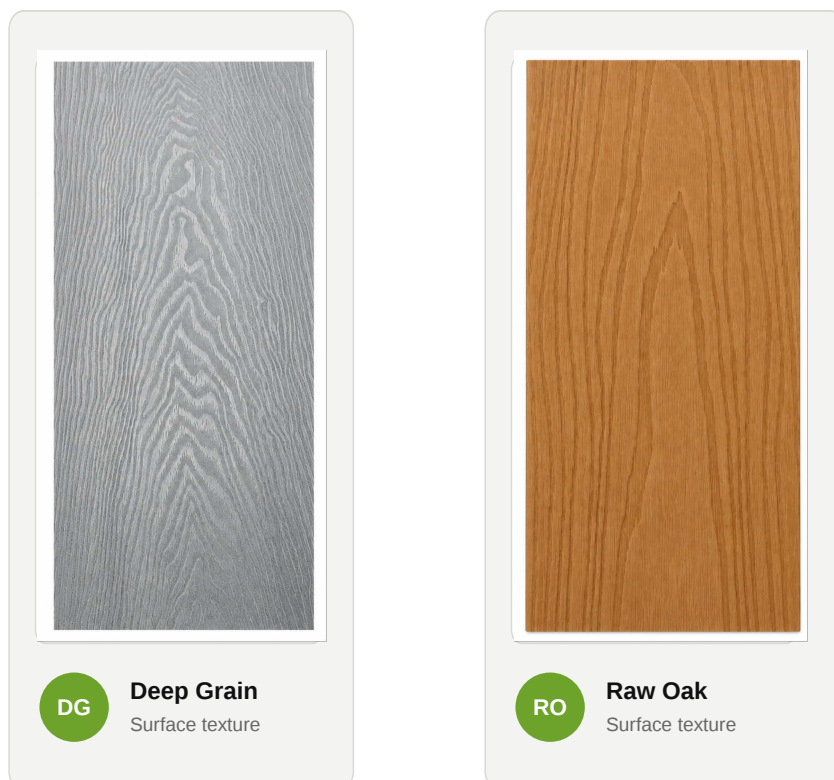

# Fastening System

Concealed clips and screws for Last Elegance Timberluxe decking boards


## CONCEALED FASTENERS

### Fasteners

The Last Elegance range of concealed decking fasteners is designed for fixing Timberluxe composite decking boards to timber or steel subframes. Barbed H-clips locate in the side groove of the board to hold it down and set a consistent gap, keeping the deck surface free of visible fixings.

### FEATURES

- Barbed H-clips for stepping (mid-board) installation.
- Board gap options: no visible gap, 3 mm or 5 mm.
- Stainless steel construction — 201, 304 or 316 grade.
- Matching self-drilling screws for steel joists.
- Silver and black finishes to suit the board colour.



### Silver H-Shaped Clamp with Barbs

#### H-TYPE CLIP WITH THORN

- **Material:** Stainless steel 201 / 304 / 316
- **Thickness:** 0.9 / 1.0 / 1.2 mm
- **Applicable board height:** 4 mm to 12 mm
- **Installation type:** Stepping mounting

- **Gap:** No visible gap / 3 mm / 5 mm
- **Piercing method:** Convex / piercing / reaming
- **Finish:** Silver



### Black H-Shaped Clamp with Barbs

#### H-TYPE CLIP WITH THORN

- **Material:** Stainless steel 201 / 304 / 316
- **Thickness:** 0.9 / 1.0 / 1.2 mm
- **Applicable board height:** 4 mm to 12 mm
- **Installation type:** Stepping mounting

- **Gap:** No visible gap / 3 mm / 5 mm
- **Piercing method:** Convex / piercing / reaming
- **Finish:** Black



### Self-Drilling Screws — Silver

#### SELF-DRILLING SCREWS

- **Material:** Stainless steel 410
- **Diameter:** 3.9 / 4.2 mm
- **Length:** 25 / 30 / 42 / 48 mm
- **Application:** Steel joist fixing

- **Head:** Countersunk, Phillips drive
- **Colour range:** Silver / black / coffee
- **Finish:** Silver



### Self-Drilling Screws — Black

#### SELF-DRILLING SCREWS

- **Material:** Stainless steel 410
- **Diameter:** 3.9 / 4.2 mm
- **Length:** 25 / 30 / 42 / 48 mm
- **Application:** Steel joist fixing

- **Head:** Countersunk, Phillips drive
- **Colour range:** Silver / black / coffee
- **Finish:** Black

## ORDERING NOTES

Fastener quantities should be calculated from deck area, board length and joist spacing.

# Fastening System

Concealed clips and screws for Last Elegance Renew decking boards

## CONCEALED FASTENERS



### Starting Buckle

#### STARTING BUCKLE

- **Material:** Stainless steel 201 / 304 / 316
- **Thickness:** 0.9 / 1.0 / 1.2 mm
- **Applicable height:** 5 mm to 12 mm
- **Overall size:** 28 × 25 mm
- **Gap:** Hidden installation
- **Piercing method:** Convex / piercing / reaming
- **Installation type:** Start
- **Colour:** Silver / black

*Screw length and clip specification should be selected to suit the frame material and panel thickness. Lengths supplied to customers' requirements.*