

Composite Fence Panels Profiles


Product views, cross-sections and nominal specifications

AVAILABLE PROFILES

158 mm PROFILE



PRODUCT VIEW

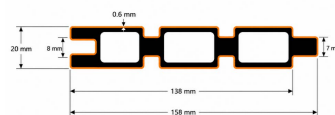

CROSS-SECTION

DIMENSIONS AND WEIGHT


PROFILE	DIMENSIONS	WEIGHT P/LM
158 mm	6.22 in x .79 in x 9.51 ft (158 x 23 x 2900 mm)	1.33 lb/ft (1.98 kg)

P/LM = per linear metre. Dimensions shown are width x thickness x length.


Colours & Surface Textures

A clear reference palette with friendly colour and finish labels

COLOUR PALETTE

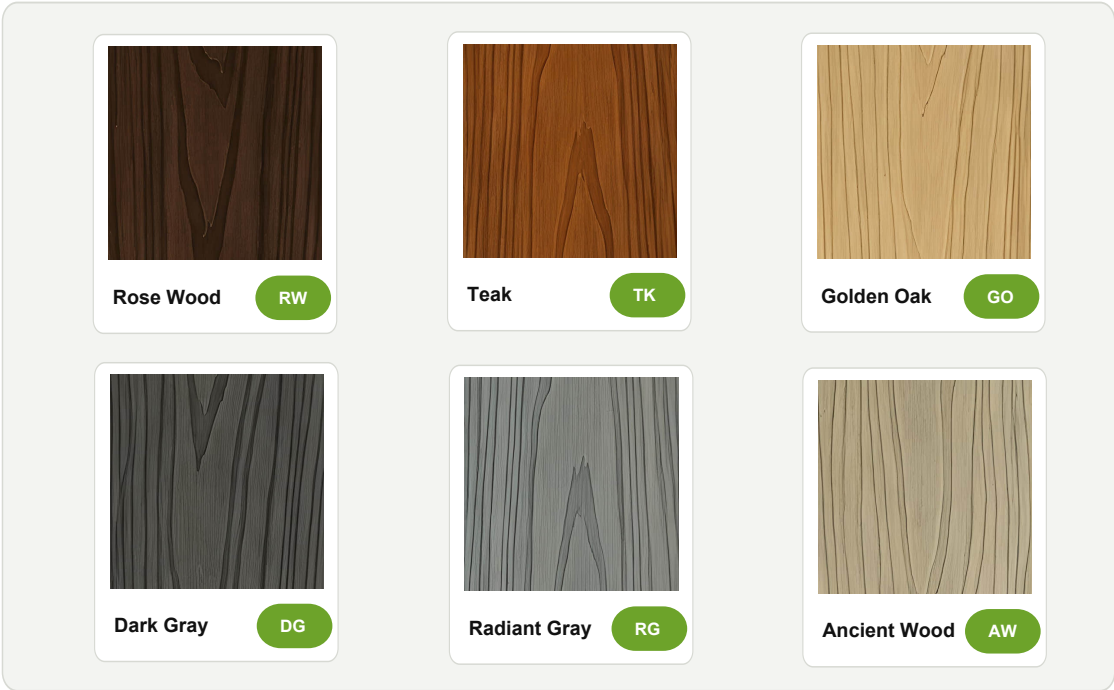

SURFACE TEXTURES

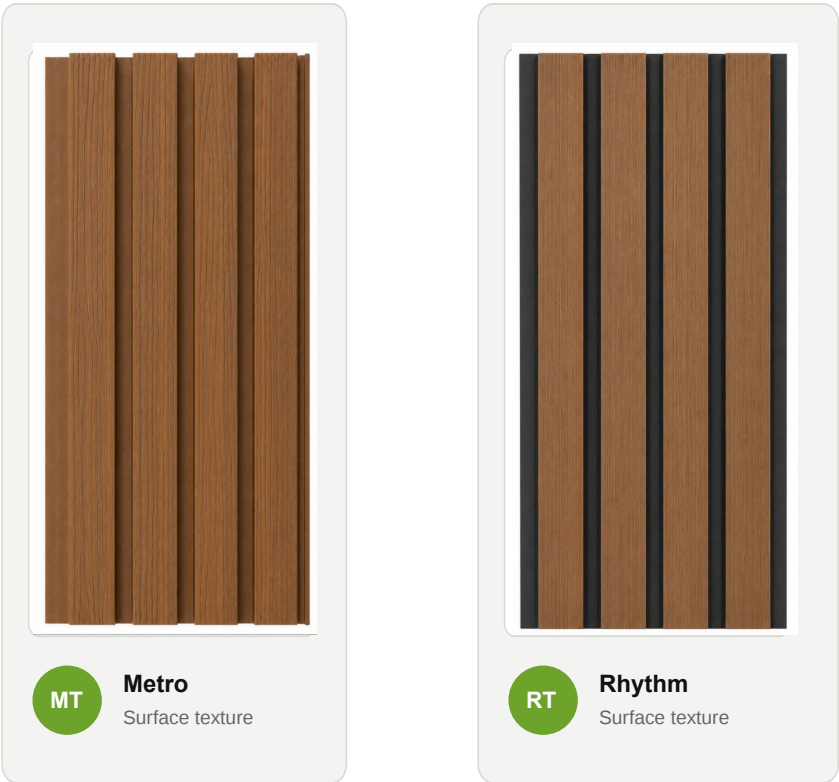

Accessories

Self-drilling screws for TwinLine Fluted Composite Fence Board installation


SELF-DRILLING SCREWS

Fixings

The Last Elegance self-drilling screws are supplied for fixing TwinLine Fluted Composite Fence Board to steel joints. The drill point forms its own hole in the steel section, so no pre-drilling is required, and the countersunk head sits flush with the fixing surface.

FEATURES


- Stainless steel 410 construction.
- Two diameters: 3.9 mm and 4.2 mm.
- Four standard lengths: 25, 30, 42 and 48 mm.
- Colour range: silver, black .
- Self-drilling point for steel joint fixing.

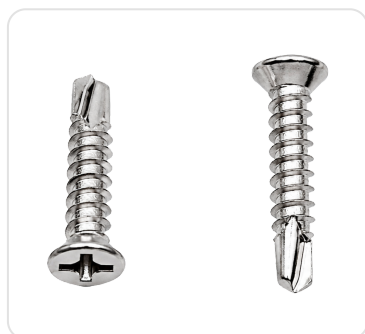

Self-Drilling Screws — Silver

SELF-DRILLING SCREWS

- **Material:** Stainless steel 410
- **Diameter:** 3.9 / 4.2 mm
- **Length:** 25 / 30 / 42 / 48 mm
- **Colour range:** Silver / black
- **Finish:** Silver
- **Application:** Steel joint fixing

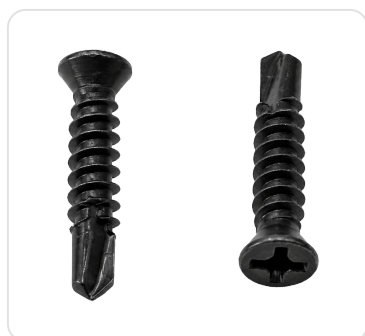

Self-Drilling Screws — Black

SELF-DRILLING SCREWS

- **Material:** Stainless steel 410
- **Diameter:** 3.9 / 4.2 mm
- **Length:** 25 / 30 / 42 / 48 mm
- **Colour range:** Silver / black
- **Finish:** Black
- **Application:** Steel joint fixing

ORDERING NOTES

Lengths are supplied as per customers' requirements. Screw quantities should be calculated from panel area, panel length and joint spacing.